


Bluetooth™ Radio

Key Features

- RF output power class 2
- Compliant with Bluetooth specification
 - 1.0b PBA 313 01/2
 - 1.1b PBA 313 01/3
- Forms a complete radio with only
 - an antenna
 - a crystal or existing
 - 13 MHz reference frequency
- Small outline BGA-package (10.2×14.0×1.6 mm)
- Requires no external shielding

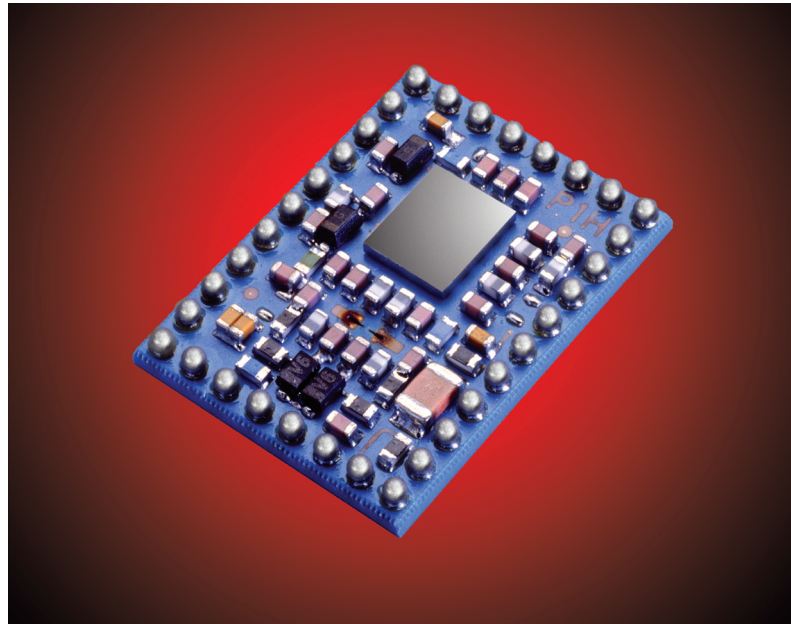

Description

The Bluetooth Radio from Ericsson Microelectronics is a short-range microwave frequency radio transceiver for Bluetooth communication links.

Provided in a compact ceramic BGA package, the Bluetooth Radio is intended primarily for embedded applications and applications requiring a flexible form factor. No external shield is required due to the innovative self-shielding design. This solution enables extremely low height implementations.

With the addition of only an antenna, a 13 MHz reference frequency crystal, and digital control functionality, the PBA 313 01 forms a complete radio.


As a result, designers can benefit from a pre-tested and ready-to-use device, providing a robust Bluetooth Radio function in the final OEM application.

The Bluetooth Radio offers a combination of compact size, low power consumption, and cost effective assembly – with the ‘flip chip’ radio IC and some major components of the radio integrated into the ceramic carrier.

This makes it ideal for Bluetooth communications applications in mobile phones, modems, laptop computers and other portable equipment.

The BLUETOOTH trademarks are owned by Bluetooth SIG, Inc., USA.

Block diagram

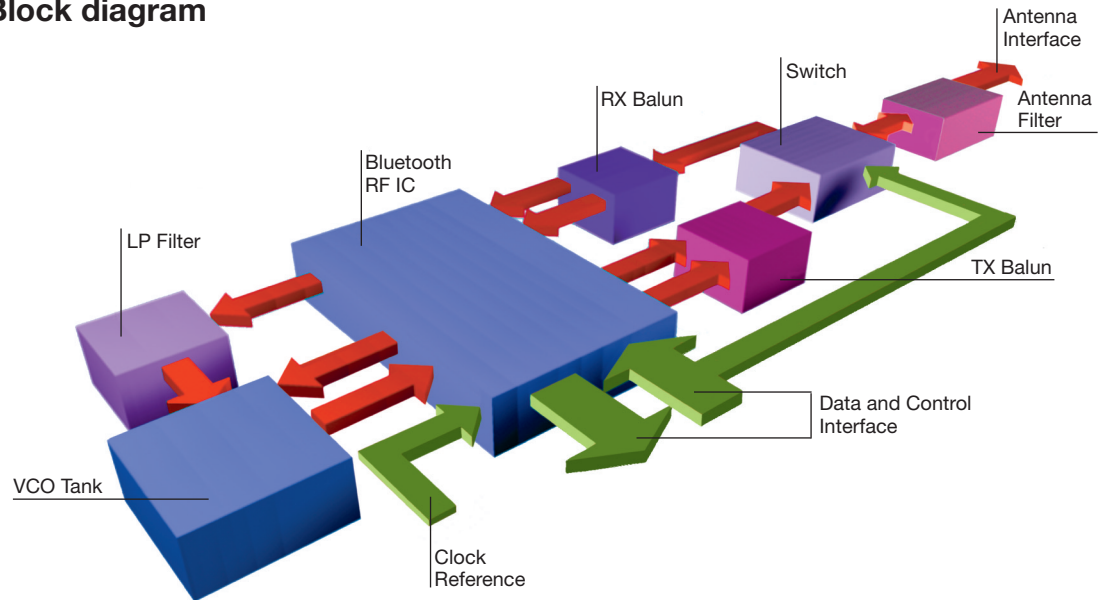

Hardware

PBA 313 01 is a short-range microwave frequency radio transceiver for Bluetooth communication links that are designed to operate in the globally available unlicensed ISM frequency band, 2.4–2.5 GHz.

Fast frequency hopping

(1600 channel hops/s) with 79 channels (2.402 to 2.480 GHz) and a maximum TX & RX bit rate of 1 Mbit/s.

The implemented modulation technique

is Gaussian Frequency Shift Keying (GFSK) with a BT product of 0.5. The channel bandwidth is 1 MHz and the frequency deviation is between 140 and 175 kHz.

The Bluetooth Radio is built around a BiCMOS ASIC. Antenna filter, RX and TX baluns are all integrated into the ceramic carrier.

Operating from a 2.8 V supply voltage, the device has a typical supply current requirement of only 40 mA (receive mode) or 35 mA (transmit mode), thus helping to extend battery life for portable equipment. A standby mode provides further power savings.

Control interface

Operation together with a Bluetooth Baseband using Ericsson Bluetooth Core is recommended.

Antenna interface

50 Ω Bluetooth ISM band antenna (2.4–2.5 GHz).

Ordering information

The Bluetooth Radio from Ericsson Microelectronics may be ordered as: PBA 313 01/2 for BT specification 1.0b and PBA 313 01/3 for BT specification 1.1.

Information given is believed to be accurate and reliable. However no responsibility is assumed for the consequences of its use nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Ericsson Microelectronics. These products are sold only according to Ericsson Microelectronics' general conditions of sale, unless otherwise confirmed in writing. Product specifications subject to change without notice.

Ericsson Microelectronics
SE-164 81 Kista, Sweden
Telephone: +46 8 757 50 00
www.ericsson.com/microelectronics

For local sales contacts, please refer to our website
or call: Int + 46 8 757 47 00, Fax: +46 8 757 47 76

The latest and most complete information
can be found on our website.

Product Brief

EN/LZT 146 14 R1E

© Ericsson Microelectronics AB, August 2001