

2.45 GHz Loop Antenna for High Data Rate WLAN Applications



Features


- *Very Efficient MLA Technology*
- *ISM Band*
- *Uni-directional Pattern*
- *Peak Gain + 2.55 dBi*
- *Low Profile for Embedded Applications*

This compact Wireless LAN antenna covers the 2.45 GHz frequency band, encompassing frequency allocations for IEEE 802.11b and Bluetooth standards. Using SkyCross' patented MLA technology, this antenna provides superior efficiency and gain directivity in a small package. This antenna is the best performance solution for developers implementing high data rate WLANs in the 2.45 GHz frequency band.


Electrical Specifications	
Frequency Range	2400 — 2500 MHz
Gain	2.55 dBi Peak
VSWR	< 3:1
Polarization	Linear
Elevation Pattern	Uni-directional
Feed Impedance	50 Ohms Unbalanced

Mechanical Specifications	
Size	1.8 x 0.8 x 0.14 inches 45.7 x 20.3 x 3.56 mm
Weight	8.9 g*
*weight includes connector	


Typical Return Loss

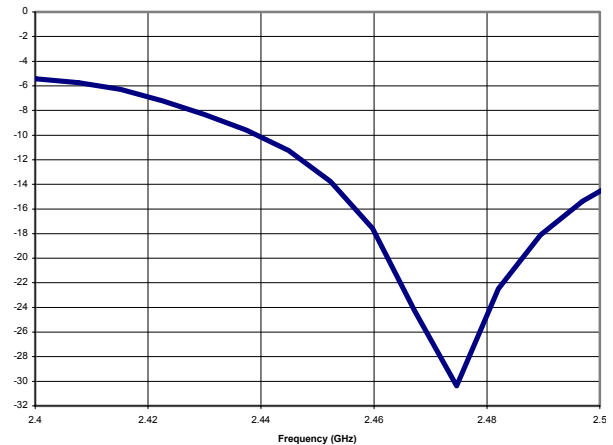


Swept Gain

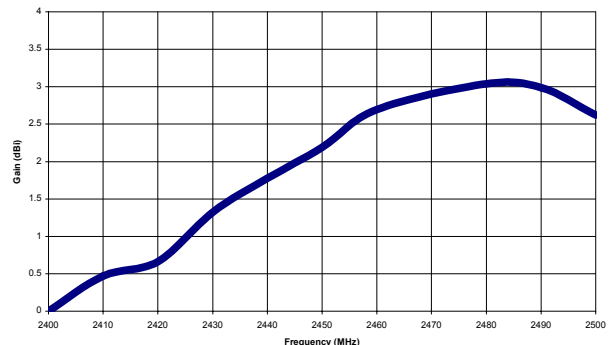

Contour Gain Map

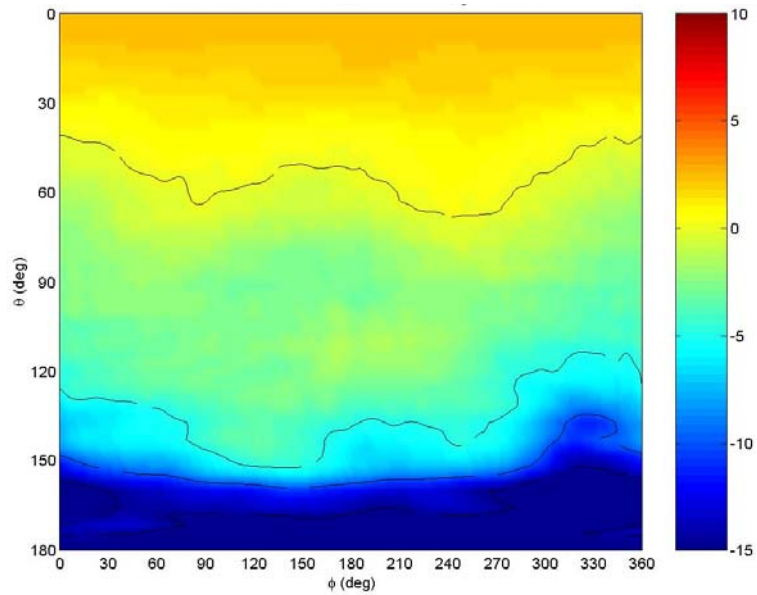

2500 MHz

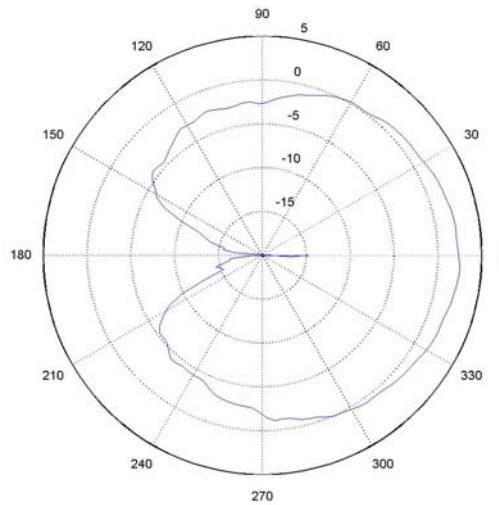

Gain at 2500 MHz Phi = 90 degrees

© 2001 SkyCross, Inc. SkyCross is a trademark of SkyCross, Inc. All rights reserved. Protected by one or more US Patents, including No. 5,790,080. Additional US and Foreign patents pending. Specification subject to change without notice.

For information regarding SkyCross Inc. and its products, see website at www.skycross.com, email info@skycross.com or call 321-308-6600